



Inspection Engine Tank Sprayers




Aim of the inspection

- Efficient use of plant protection products
- Homogeneous distribution of the sprayed liquid
- Prevents plant - and environment damage


What will be inspected:

Measurements:

Agitation capacity

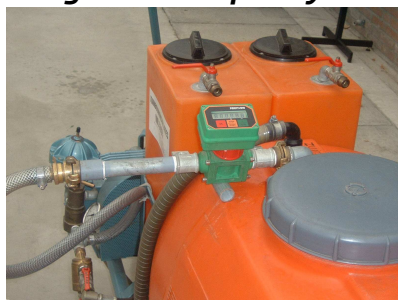

Manometers

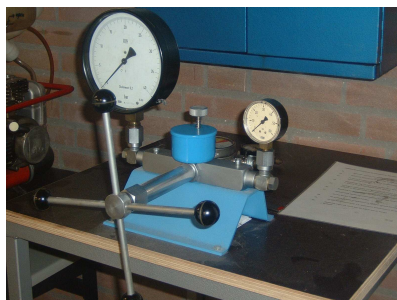

Output of the nozzles




Visual check:

Condition Pipes and Hoses

Cover spray liquid tank
Readability content of the tank

Leakages installation

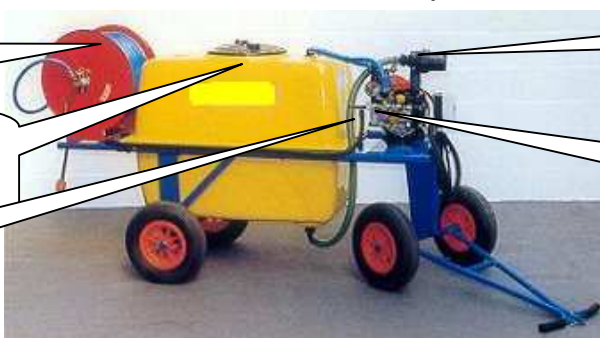

Filters

Electrical and mechanical safety

DUURZAAM
ONKRUIDBEHEER
OP VERHARDINGEN



EUREPGAP®



GAP Qualified

Why this inspections:

- The installation stays in good condition (less stand-still);
- A precise partitioning of plant protection products;
- Technical problems are traced early as a result of which wear is prevented;
- A more efficient use of plant protection products;
- Meet the requirements of food safety and green label quality systems (DOB, EUREPGAP, MPS-GAP, MILIEUKEUR, GLK, Nature's Choice, etc.);
- Safety for the operator and the environment.